


Order No.: 1847068

Type: MC 1,5/ 3-STF-3,5

Plug component, Screw connection with tension sleeve

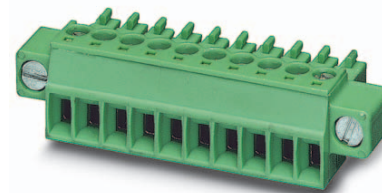

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|---------------------------|--------------------------------------|------------------------|---------------------|
| • No. of pos. | 3 | • Nominal current | 8 A |
| • Conductor cross section | 1.5 mm ² | • Nominal voltage | 160 V |
| • Color | green | • Connection direction | 0 ° |
| • Pitch | 3.5 mm | • Type of packaging | packed in cardboard |
| • Connection method | Screw connection with tension sleeve | | |

2 Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Screwable flange for superior mechanical stability




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1847068

3 Table of contents

1	Main features	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only)	3
5	item properties	4
	5.1 Connection capacity	4
	5.2 Material data	4
6	Dimensions	4
	6.1 Dimensions for the product	5
7	Series drawing	6
8	Packaging information	7
9	Application	7
	9.1 Temperature limit values	7
10	Mechanical tests	8
	10.1 Termination and connection method	8
	10.2 Pull-out test	8
11	Electrical tests	9
	11.1 Electrical data	9
	11.2 Air and creepage distances	9
12	Current carrying capacity/derating curves	10
13	Environmental and durability tests	12
	13.1 Vibration test	12
14	Classification for connectors	12
15	Approvals	12
16	Commercial Data	14
17	corresponding headers	14
18	Accessories	14
19	Combination tests	15

1847068 MC 1,5/ 3-STF-3,5

4 3D model in PDF can be activated (Acrobat Reader only)

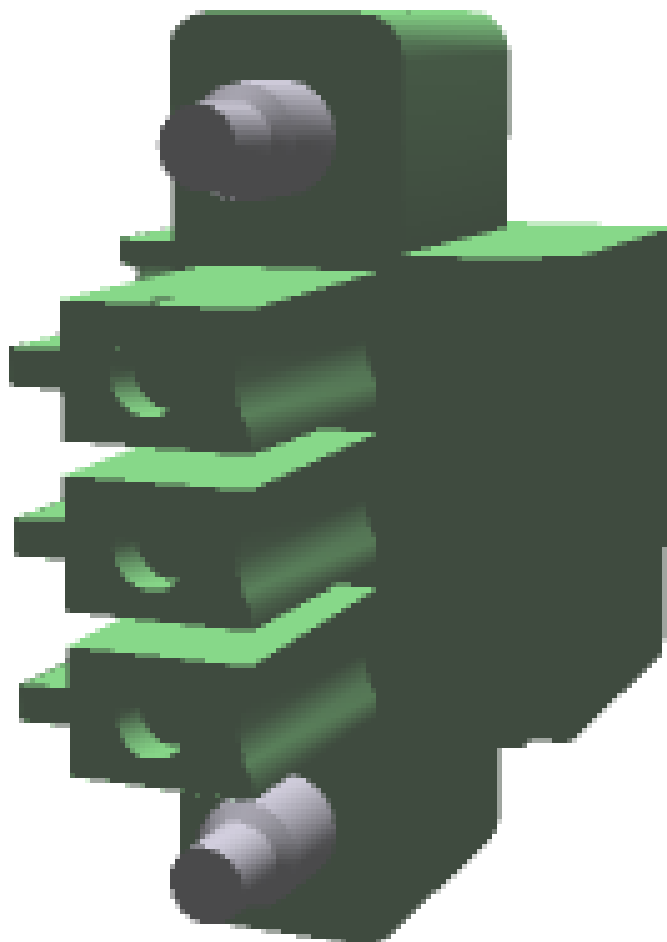

1847068 MC 1,5/ 3-STF-3,5**5 item properties**

Order No.	1847068
Type	MC 1,5/ 3-STF-3,5
Type of contact	Female connector
Range of articles	MC 1,5/...-STF
Pitch	3.5 mm
Number of positions	3
Connection method	Screw connection with tension sleeve
Drive form screw head	Slotted (L)
Screw thread	M2
Tightening torque	0.22 Nm ... 0.25 Nm
Note on tightening torque	
Locking	Screw flange

5.1 Connection capacity

Conductor cross section, solid	0.14 mm ² to 1.5 mm ²
Conductor cross section, flexible	0.14 mm ² to 1.5 mm ²
Conductor cross section AWG/kcmil	28 to 16
2 conductors with same cross section, solid	0.08 mm ² to 0.5 mm ²
2 conductors with same cross section, stranded	0.08 mm ² to 0.75 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² to 1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² to 0.5 mm ²
2 conductors with same cross section, stranded, with ferrule without plastic sleeve	0.25 mm ² to 0.34 mm ²
2 conductors with same cross section, stranded, with TWIN ferrules with plastic sleeve	0.5 mm ² to 0.5 mm ²
Cylindrical gauge a x b / diameter	2.4 mm x 1.5 mm / 1.6 mm
Stripping length	7 mm

5.2 Material data


Material of metal parts		
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201	
Contact material	Cu alloy	
Terminal point surface	Sn 4 µm ... 8 µm	
Surface contact area	Sn 4 µm ... 8 µm	
Surface characteristics	hot-dip tin-plated	
Insulating material data	Housing	Housing
Insulating material	PA	
CTI according to IEC 60112	600	
Flammability rating according to UL 94	V0	
Color	green (6021)	
Glow wire flammability index GWFI according to EN 60695-2-12	850	
Glow wire ignition temperature GWIT according to EN 60695-2-13	775	
Temperature for the ball pressure test according to EN 60695-10-2	125 °C	

6 Dimensions

6.1 Dimensions for the product

Length	16.1 mm
Width	20.8 mm
Total height	11.1 mm
Dimension a	7 mm

7 Series drawing

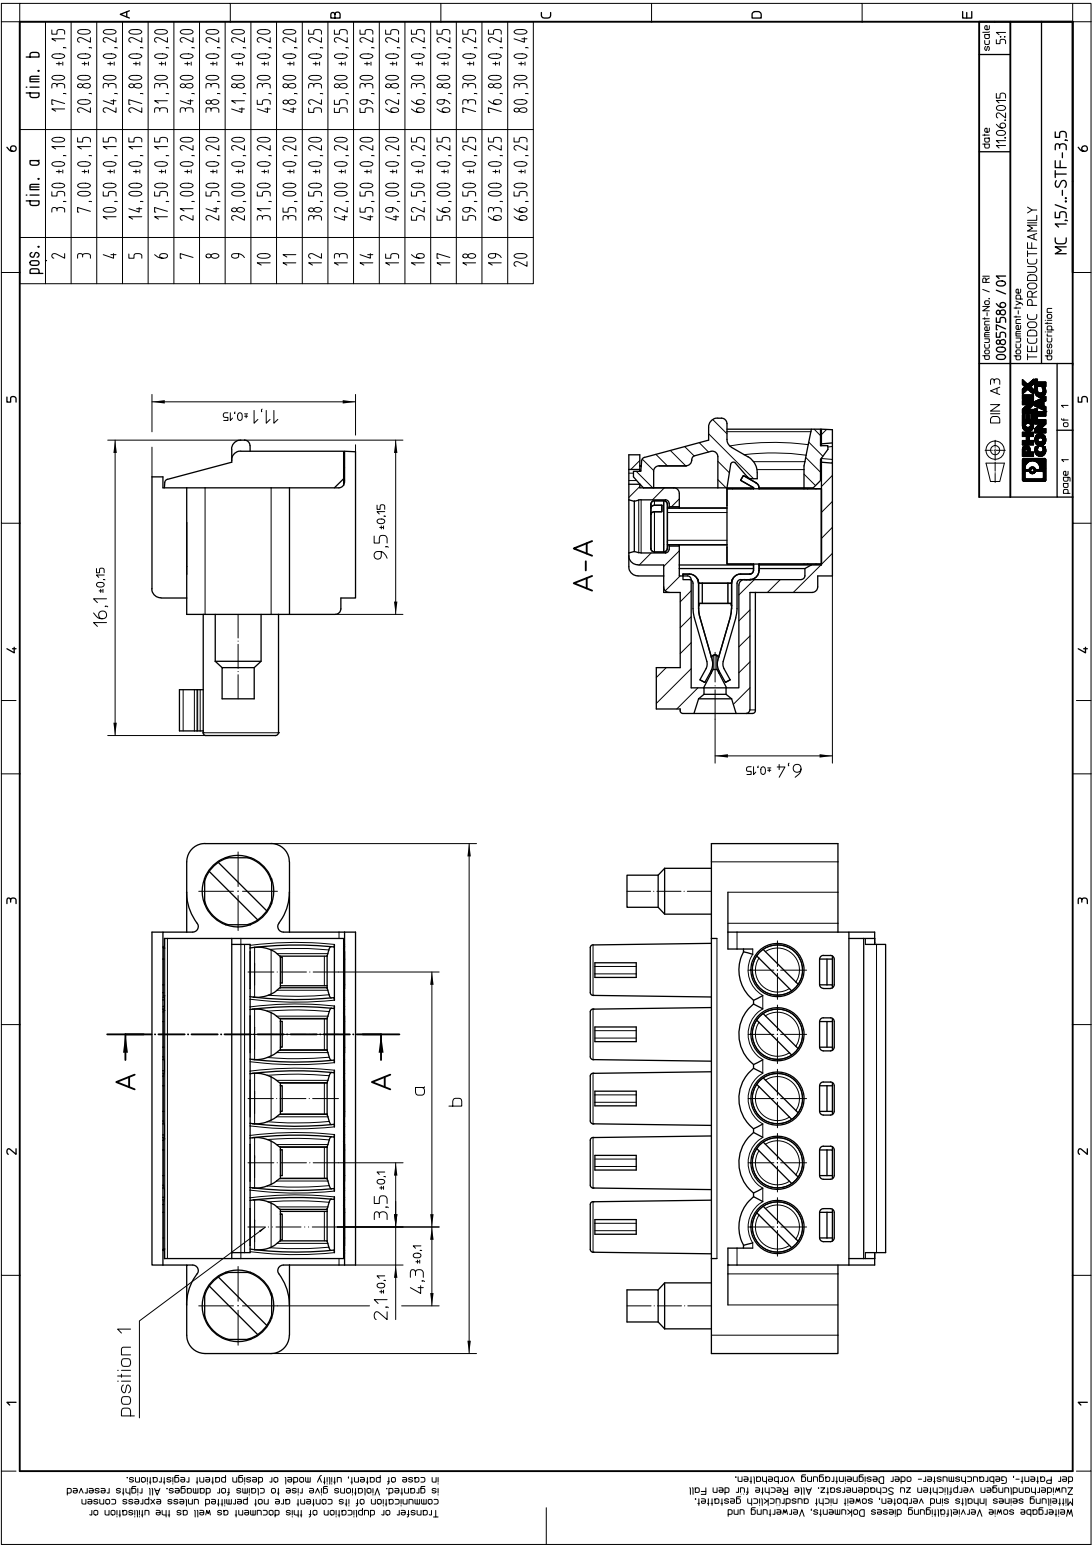

1847068 MC 1,5/ 3-STF-3,5**8 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	250

9 Application**9.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1847068 MC 1,5/ 3-STF-3,5**10 Mechanical tests****Mechanical test group A**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	6 N
Withdraw strength per pos. approx.	4 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	24.5 N

10.1 Termination and connection method

Specification	IEC 60999-1:1999-11
Check for damage to conductor or loosening	Test passed

10.2 Pull-out test**Termination and connection method: pull-out test**

Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / stranded / > 10 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / solid / > 40 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / stranded / > 40 N

1847068 MC 1,5/ 3-STF-3,5**11 Electrical tests****11.1 Electrical data**

Rated current / conductor cross section	8 A / 1.5 mm ²
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Contact resistance	1.3 mΩ
Degree of pollution	2

11.2 Air and creepage distances

Component	Plug component		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	1.5 mm	1.5 mm	1.5 mm
Minimum value of the creepage path requirement in acc. with table	2 mm	1.5 mm	1.6 mm

1847068 MC 1,5/ 3-STF-3,5

12 Current carrying capacity/derating curves

Specification

IEC 61984:2008-10

Note

Representation based on IEC 60512-5-2:2002-02

Reduction factor

0.8


Number of positions

See diagram


Conductor cross section

1.5 mm²


Type: MC 1,5/...-STF-3,5 with MC 1,5/...-GF-3,5

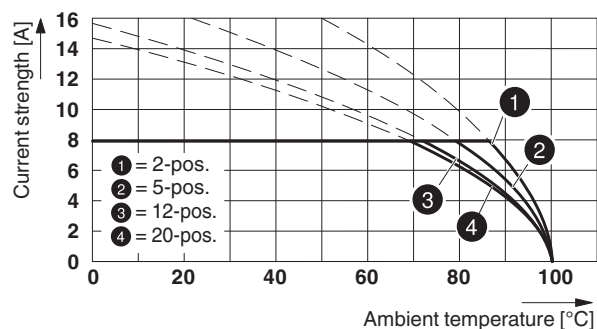


Type: MC 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5

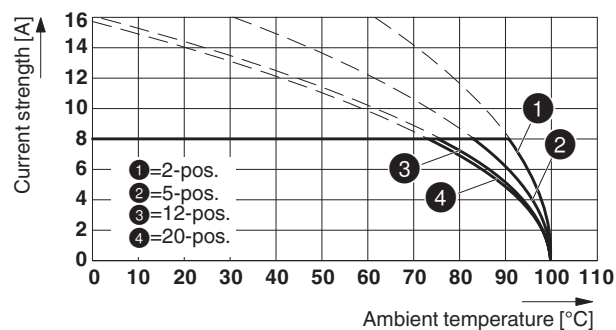

Type: MC 1,5/...-ST(F)-3,5 with MCV 1,5/...-G(F)-3,5 P... THR

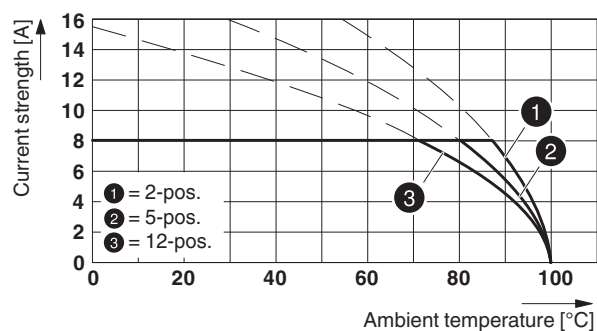

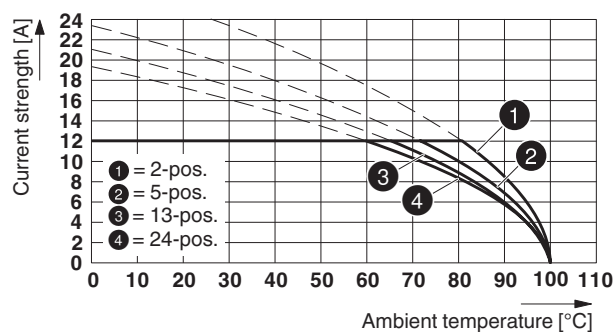1847068 MC 1,5/ 3-STF-3,5**Type: MC 1,5/...-ST(F)-3,5 with MC 1,5/...-G(F)-3,5 P... THR****Type: MC 1,5/...-STF-3,5 with MCV 1,5/...-GSF-3,5 P26 THT**

96354_1000_en

1847068 MC 1,5/ 3-STF-3,5**13 Environmental and durability tests****13.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protective conductor	without PE
Lock	no
Connection method	Screw terminal points

15 Approvals

CSA 				
Use group	B	D		
mm ² /AWG/kcmil	28-16	28-16		
Voltage	300 V	300 V		
Current	8 A	8 A		
VDE Gutachten mit Fertigungsüberwachung 				
mm ² /AWG/kcmil	0.2-1.5			
Voltage	160 V			
Current	8 A			
IECEE CB Scheme 				
mm ² /AWG/kcmil	0.2-1.5			
Voltage	160 V			
Current	8 A			
CCA				
mm ² /AWG/kcmil	0.2-1.5			
Voltage	160 V			
Current	8 A			

1847068 MC 1,5/ 3-STF-3,5cULus Recognized 

Use group	B	D		
mm ² /AWG/kcmil	30-14	30-14		
Voltage	300 V	300 V		
Current	8 A	8 A		

EAC 

1847068 MC 1,5/ 3-STF-3,5**16 Commercial Data**

Order No.	1847068
Type	MC 1,5/ 3-STF-3,5
Pieces per package	250
Net weight	2.823 g
GTIN	4017918113452
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding headers


Order No.	Type
1780684	MCV 1,5/ 3-GF-3,5 P20 THRR56
1789180	MC 1,5/ 3-GF-3,5 P26 THR
1789193	MC 1,5/ 3-GF-3,5 P26 THRR56
1789410	MC 1,5/ 3-GF-3,5 P20 THRR56
1789627	MC 1,5/ 3-GF-3,5 P14 THR
1789630	MC 1,5/ 3-GF-3,5 P14 THRR56
1843237	MCV 1,5/ 3-GF-3,5
1843800	MC 1,5/ 3-GF-3,5
1897254	EMC 1,5/ 3-GF-3,5
1911172	EMCV 1,5/ 3-GF-3,5
1937321	MC 1,5/ 3-GF-3,5 THT
1937415	MCV 1,5/ 3-GF-3,5 THT
1996870	MC 1,5/ 3-GF-3,5 THT-R56

18 Accessories


Description	Order No.	Type
	0804073	SK 3,5/2,8:FORTL.ZAHLEN
Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip	1205037	SZS 0,4X2,5 VDE

1847068 MC 1,5/ 3-STF-3,5


19 Combination tests



MC 1,5/..-STF



MC 1,5/..-GF



MCV 1,5/..-GF



MCV 1,5/..-GF-THR



MC 1,5/..-GF-THR

Specification	IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)				
Insertion/withdrawal force per position	approx. 6 N / 4 N	approx. 6 N / 5 N	approx. 6 N / 4 N	approx. 8 N / 5 N
Polarization when inserted Requirement >20 N	Test passed	Test passed	Test passed	Test passed
Contact holder in insert Requirements >20 N	Test passed	Test passed	Test passed	Test passed
Durability tests (B)				
Contact resistance R_1	1.3 m Ω	1.8 m Ω	1.2 m Ω	1.3 m Ω
Insertion/withdrawal cycles	25	25	25	25
Contact resistance R_2	1.4 m Ω	2.2 m Ω	1.3 m Ω	1.3 m Ω
Rated impulse voltage at sea level Voltage waveform $\geq (1.2/50 \mu s)$	2.95 kV	2.95 kV	2.95 kV	2.95 kV
Power-frequency withstand voltage Voltage waveform $\geq (50/60 \text{ Hz})$	1.39 kV	1.39 kV	1.39 kV	1.39 kV
Insulation resistance Requirements > 5 M Ω	1.6 T Ω	10 ¹² Ω	> 1 T Ω	> 4 T Ω
Thermal tests (C)				
Tested number of positions	20	20	12	20
Tested conductor cross section	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²
Test current	8 A DC	8 A DC	8 A DC	8 A
Upper limiting temperature Requirements < 100°C	Test passed	Test passed	Test passed	Test passed
Climatic tests (D)				
Test sequence 1: low temperature storage	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h	-40 °C/2 h
Test sequence 2: heat storage	100 °C/168 h	100 °C/168 h	100 °C/168 h	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle	0.2 dm ³ SO ₂ on 300 dm ³ / 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform $\geq (1.2/50 \mu s)$	2.95 kV	2.95 kV	2.95 kV	2.95 kV
Power-frequency withstand voltage Voltage waveform $\geq (50/60 \text{ Hz})$	1.39 kV	1.39 kV	1.39 kV	1.39 kV
Environmental and endurance tests (E)				
Specification	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10	IEC 61984:2008-10
Degree of protection	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger	Finger safety with IP20 test finger

1847068 MC 1,5/ 3-STF-3,5**MC 1,5/..-STF**

Specification

Mechanical tests (A)

Insertion/withdrawal force per position

Polarization when inserted
Requirement >20 NContact holder in insert
Requirements >20 N**Durability tests (B)**Contact resistance R_1

Insertion/withdrawal cycles

Contact resistance R_2 Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ Insulation resistance
Requirements > 5 M Ω **Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature
Requirements < 100°C**Climatic tests (D)**

Test sequence 1: low temperature storage

Test sequence 2: heat storage

Test sequence 3: noxious gas storage
(ISO 6988)Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Environmental and endurance tests (E)**

Specification

Degree of protection

**MCV 1,5/..-GSF**

IEC 61984

approx. 8 N / 5 N

Test passed

Test passed

1.2 m Ω

25

1.2 m Ω

2.95 kV

1.39 kV

> 9 T Ω

12

1.5 mm²

8 A DC

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

2.95 kV

1.39 kV

IEC 61984:2008-10

Finger safety with IP20
test finger