




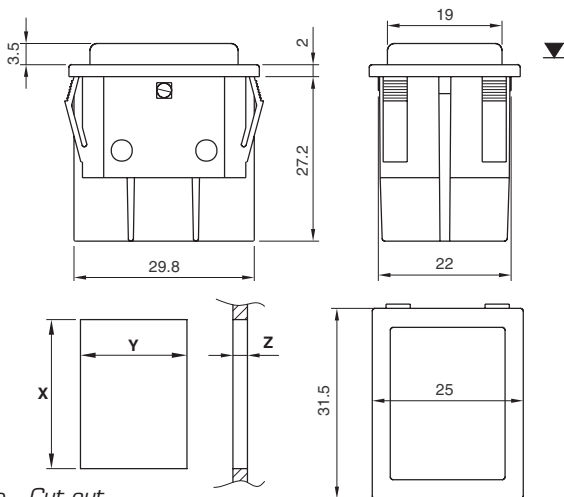











 SEGNALATORE LUMINOSO / <i>INDICATOR LIGHT</i>																					
Portata Rating	200 – 250 VAC T125°C	200 – 250 VAC T65°C																			
    Dima - <i>Cut out</i> <table><thead><tr><th>Z</th><th>Y</th><th>X</th></tr></thead><tbody><tr><td>0.75 ... 1.25</td><td>22.0^{+0.2}₀</td><td>30.0⁰_{-0.1}</td></tr><tr><td>1.25 ... 2.0</td><td>22.0^{+0.2}₀</td><td>30.2⁰_{-0.1}</td></tr><tr><td>2.0 ... 3.0</td><td>22.0^{+0.2}₀</td><td>30.6⁰_{-0.2}</td></tr><tr><td>3.0 ... 4.0</td><td>22.0^{+0.2}₀</td><td>30.8⁰_{-0.2}</td></tr></tbody></table>			Z	Y	X	0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}	1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}	2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}	3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}	Schema <i>Wiring diagram</i> 	Colore corpo <i>Body colour</i> 	Gemma <i>Lens</i> 	Codice <i>P/N Code</i> B71121G000000
Z	Y	X																			
0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}																			
1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}																			
2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}																			
3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}																			
						B71121E000000															
						B71121H000000															

 TAPPO COPRIFORO / HOLE COVER		Colore corpo Body colour	Gemma Lens	Codice P/N Code															
 Dima - Cut out <table><thead><tr><th>Z</th><th>Y</th><th>X</th></tr></thead><tbody><tr><td>0.75 ... 1.25</td><td>22.0^{+0.2}₀</td><td>30.0⁰_{-0.1}</td></tr><tr><td>1.25 ... 2.0</td><td>22.0^{+0.2}₀</td><td>30.2⁰_{-0.1}</td></tr><tr><td>2.0 ... 3.0</td><td>22.0^{+0.2}₀</td><td>30.6⁰_{-0.2}</td></tr><tr><td>3.0 ... 4.0</td><td>22.0^{+0.2}₀</td><td>30.8⁰_{-0.2}</td></tr></tbody></table>		Z	Y	X	0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}	1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}	2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}	3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}			B71XX1X00015
Z	Y	X																	
0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}																	
1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}																	
2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}																	
3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}																	

 INTERRUTTORE + INTERRUTTORE LUMINOSO / SWITCH + ILLUMINATED SWITCH				
Portata Rating	Terminale Terminal	Foto prodotto Picture	Codice P/N Code	Tipo Type
16 (6) A / 250VAC 10 (4) A / 250VAC - 5E4 T120/55 °C 20 A / 125 VAC - 16 A / 250 VAC 1/3 HP - 250 VAC 3/4 HP - 125 VAC - T105 °C	3 		B23FC111000EO	

 INTERRUTTORE LUMINOSO + DEVIATORE / ILLUMINATED SWITCH + TWO WAY SWITCH				
Portata Rating	Terminale Terminal	Foto prodotto Picture	Codice P/N Code	Tipo Type
16 (6) A / 250VAC 10 (4) A / 250VAC - 5E4 T120/55 °C 20 A / 125 VAC - 16 A / 250 VAC 1/3 HP - 250 VAC 3/4 HP - 125 VAC - T105 °C	1 		B21UC1G100000	

 SEGNALATORE LUMINOSO / <i>INDICATOR LIGHT</i>																				
Portata Rating	200 - 250 VAC T125°C	200 - 250 VAC T65°C																		
     Dima / <i>Cut out</i><table><tr><th>Z</th><th>Y</th><th>X</th></tr><tr><td>0.75 ... 1.25</td><td>22.0^{+0.2}₀</td><td>30.0⁰_{-0.1}</td></tr><tr><td>1.25 ... 2.0</td><td>22.0^{+0.2}₀</td><td>30.2⁰_{-0.1}</td></tr><tr><td>2.0 ... 3.0</td><td>22.0^{+0.2}₀</td><td>30.6⁰_{-0.2}</td></tr><tr><td>3.0 ... 4.0</td><td>22.0^{+0.2}₀</td><td>30.8⁰_{-0.2}</td></tr></table>			Z	Y	X	0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}	1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}	2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}	3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}	Schema <i>Wiring diagram</i> 	Foto <i>Picture</i> 	Codice <i>P/N Code</i> B61121GE00000 B61121GL00000
Z	Y	X																		
0.75 ... 1.25	22.0 ^{+0.2} ₀	30.0 ⁰ _{-0.1}																		
1.25 ... 2.0	22.0 ^{+0.2} ₀	30.2 ⁰ _{-0.1}																		
2.0 ... 3.0	22.0 ^{+0.2} ₀	30.6 ⁰ _{-0.2}																		
3.0 ... 4.0	22.0 ^{+0.2} ₀	30.8 ⁰ _{-0.2}																		