



B4MASK



TYPICAL APPLICATIONS Outdoor electrical equipments, pumps, high pressure cleaners

FUNCTIONS

- SPST
- DPST, illuminated or not
- DPCO

PROTECTION DEGREE IP 65

CYCLE No. 50.000

CUT OUT 30x22 mm

AMBIENT TEMPERATURE 120 °C

GWT 850 °C




GWT NO FLAME (<2sec) 750 °C on demand

B 4 M A S K

?

DRAWING


TERMINAL



Available in Gloss or Mat


1 Gloss version

3 Mat version







4 Gloss version

5 Mat version




L Gloss version

P Mat version



Available in Gloss or Mat

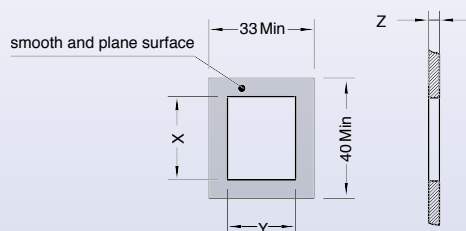

Z	Y	X
0,75 ... 1,25	22,0	$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$ 30,2 $\pm 0,1$
1,25 ... 2,0	22,0	$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$ 30,6 $\pm 0,1$
2,0 ... 3,0	22,0	$\begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$ 30,8 $\pm 0,1$

B	4	M	A	S	K	TERMINAL	FUNCTION	RATING	RUBBER COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING	0	0	0
---	---	---	---	---	---	----------	----------	--------	---------------	---------------	----------------	---------	---	---	---

?	?	?	?	?	?	0	0	0
---	---	---	---	---	---	---	---	---

FUNCTION

RATING

RUBBER COLOUR

ROCKER COLOUR

MARKING COLOUR

MARKING

1

2

8

9 Terminal 1 - 3

C

Function 9

16 (6) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T120/55 °C
EN 61058

20 A / 125 VAC
16 A / 250 VAC
1/3 HP - 125 VAC
3/4 HP - 250 VAC
T105 °C
UL 1054

E

Function 1

16 (8) A / 250 VAC
12 (10) A / 250 VAC - 5E4
T120 / 55 °C
EN 61058

20 A / 125 VAC
16 A / 250 VAC
1/3 HP - 125 VAC
3/4 HP - 250 VAC
T105 °C
UL 1054

N

Function 2 - 8

16 (8) A / 250 VAC
12 (10) A / 250 VAC - 5E4
T120/55 °C
EN 61058

20 A / 125 VAC
16 A / 250 VAC
3/4 HP - 125 / 250 VAC
T105 °C
UL 1054

S

Function 2 - 8

20 (10) A / 250 VAC
14 (14) A / 250 VAC - 5E4
T120/55 °C
EN 61058

25 A / 125 VAC
16 A / 250 VAC
3/4 HP - 125 / 250 VAC
T105 °C
UL 1054

1 black

1 black

2 white

3 orange

ILLUMINATED ✖

G red

E green

L white

F blue

BRIGHT ✖

A orange

V green

X custom

0 none

1 black

2 white

X custom

0

1

A

9

X