

File Number 1004


T6000, T6001, T6006 Series

16-A Silicon Triacs

For Power Control and Power-Switching Applications

Features:

- 800V, 125 Deg. C T_J Operating
- High dv/dt and di/dt Capability
- Low Switching Losses
- High Pulse Current Capability
- Low Forward and Reverse Leakage
- Sipos Oxide Glass Multilayer Passivation System
- Advanced Unisurface Construction
- Precise Ion Implanted Diffusion Source

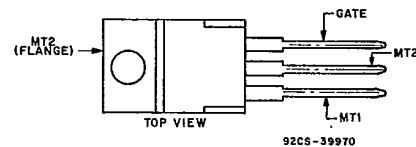TERMINAL DESIGNATIONS

JEDEC TO-220AB

The RCA-T6000, T6001 and T6006 series triacs are gate-controlled full-wave silicon switches utilizing a plastic case with three leads to facilitate mounting on printed circuit boards. They are intended for the control of ac loads in such applications as motor controls, light dimmers, heating controls, and power-switching systems. These devices are designed to switch from an off-state to an on-state for either polarity of applied voltage with positive or negative gate triggering voltages. They have an on-state current rating of 16 amperes at a T_C of 95°C.

The T6001-series triacs are characterized for I⁺, III⁻ gate

triggering modes only and should suit a wide range of applications that employ diac or anode on/off triggering. The T6006-series triacs are characterized for I⁺ and III⁺ gate-triggering modes only. They are intended for power-control applications in which integrated-circuit zero-crossing switches, such as the RCA-CA3059 series, are used as the triac-triggering circuits. The T6006-series triacs have gate characteristics which assure that a CA3059-series integrated circuit can supply sufficient gate current to trigger them over their full operating temperature range.

MAXIMUM RATINGS, Absolute-Maximum Values:

	T6000B T6001B T6006B	T6000D T6001D T6006D	T6000M T6001M T6006M	T6000N T6001N T6006N	
V_{DROM}^* : $T_J = -65$ to 125°C	200	400	600	800V	
$I_{T(RMS)}$: $T_C = 95^\circ\text{C}$, $\theta 360^\circ$			16		A
I_{TSM} : For one cycle of applied principal voltage					
60 Hz (sinusoidal), $T_C = 80^\circ\text{C}$			150		A
50 Hz (sinusoidal), $T_C = 80^\circ\text{C}$			140		A
di/dt : $v_D = V_{DROM}$, $I_{GT} = 200$ mA, $t_r = 0.1 \mu\text{s}$			100		A/ μs
I_{at} [At T_C shown for $I_{T(RMS)}$]:					
$t = 10$ ms			100		A ² s
$t = 4.25$ ms			49		A ² s
I_{GTM} ■					
For 1 μs max.			4		A
P_{GM} (For 1 μs max., $I_{GTM} \leq 4$ A)			16		W
$P_{G(AV)}$			0.5		W
T_{stg}			-65 to 150		°C
T_C			-65 to 125		°C
T_T (During soldering for 10 s max.)			225		°C

*For either polarity of main terminal 2 voltage (V_{MT2}) with reference to main terminal 1.

■For either polarity to gate voltage (V_G) with reference to main terminal 1.

3875081 G E SOLID STATE

01E 17819

D

T-25-15

Triacs

T6000, T6001, T6006 Series**ELECTRICAL CHARACTERISTICS**

At Maximum Ratings Unless Otherwise Specified, and at Indicated Temperatures

CHARACTERISTIC	LIMITS			UNITS
	For All Types Except as Specified			
	Min.	Typ.	Max.	
$I_{DROM}^{\bullet}$ $T_J=125^{\circ}\text{C}$, V_{DROM} = Max. rated value	—	0.1	1.2	mA
$v_{TM}^{\bullet}$ i_T = 30 A (peak), T_C = 25°C	—	1.4	1.75	V
T6000, T6006 Series T6001 Series	—	1.8	2.0	
$I_{HO}^{\bullet}$ v_D = 12 V, T_C = 25°C	—	15	35	mA
T6000 Series T6001 Series	—	20	—	
For other case temperatures	See Fig. 6			
$dv/dt^{\bullet}$ v_D = V_{DROM} , $i_{T(RMS)}$ = 16 A, di/dt = 8.5A/ms, T_C = 95°C	4	10	—	V/ μs
$dv/dt^{\bullet}$ v_D = V_{DROM} , T_C = 125°C				V/ μs
T6000B, T6001B, T6006B	100	300	—	
T6000D, T6001D, T6006D	75	250	—	
T6000M, T6001M, T6006M	60	200	—	
T6000N, T6001M, T6006M	30	70	—	
$I_{GT}^{\bullet\blacksquare}$ Mode V_{MT2} V_G v_D = 12 V (dc) 1+ positive positive T6000 series	—	25	50	mA
R_L = 30 Ω T6001 series	—	—	80	
T_C = 25°C T6006 series	—	—	45	
III- negative negative T6000 series	—	25	50	mA
T6001 series	—	—	80	
I- positive negative T6000 series only	—	45	80	
III+ negative positive T6000 series only	—	45	80	mA
T6006	—	—	45	
For other case temperatures	See Figs. 7 & 8			
$V_{GT}^{\bullet}$ v_D = 12 v (dc), R_L = 30 Ω , T_C = 25°C	—	1.25	3.0	V
T6001 I+ III-	—	1.25	1.5	
T6006 I+ III+	—	1.25	2.5	
T6000 all models	0.2	—	—	
v_D = V_{DROM} , R_L 125 Ω , T_C = 125°C	See Fig. 9			
For other case temperatures				
t_{GT} v_D = V_{DROM} , I_{GT} = 80 mA, t_r = 0.1 μs , i_T = 25 A (peak), T_C = 25°C	—	1.6	—	μs
$R_{\theta JC}$	—	—	1.5	$^{\circ}\text{C/W}$
$R_{\theta JA}$	—	—	50	$^{\circ}\text{C/W}$

*For either polarity of main terminal 2 voltage (V_{MT2}) with reference to main terminal 1.■For either polarity of gate voltage (V_G) with reference to main terminal 1.

3875081 G E SOLID STATE

01E 17820

D T-25-15
Traces

T6000, T6001, T6006 Series

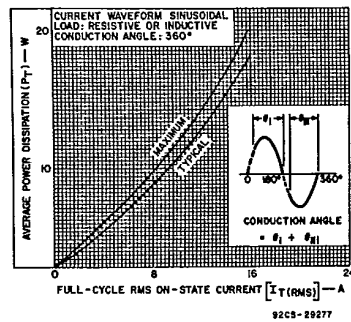


Fig. 1 — Power dissipation vs. on-state current.

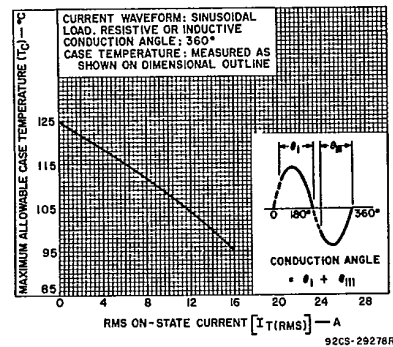


Fig. 2 — Maximum allowable case-temperature vs. on-state current.

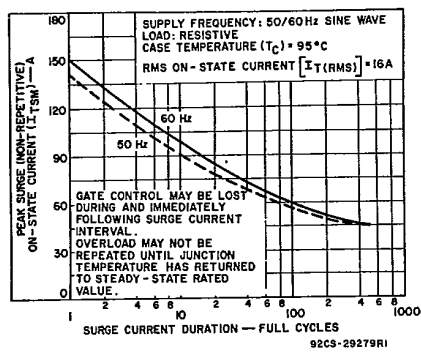


Fig. 3 — Peak surge on-state current vs. surge current duration.

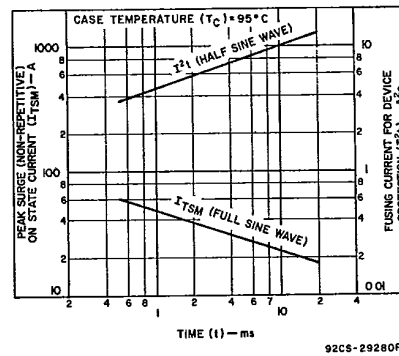


Fig. 4 — Peak surge on-state current and fusing current vs. time.




Fig. 5 — On-state current vs. on-state voltage.




Fig. 6 — DC holding current vs. case temperature.

3875081 G E SOLID STATE
Triacs

01E 17821

D T-25-15

T6000, T6001, T6006 Series



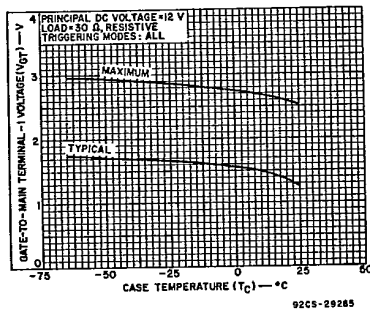
Fig. 7 — DC gate-trigger current (for I⁺ and I⁻ triggering modes) vs. case temperature.Fig. 8 — DC gate-trigger current (for I⁺ and I⁻ triggering modes) vs. case temperature for T6000-series only.

Fig. 9 — DC gate-trigger voltage vs. case temperature for T6000 series only.

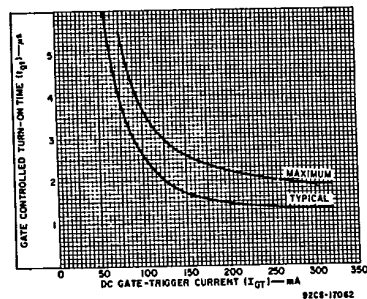


Fig. 10 — Turn-on time vs. gate-trigger current.

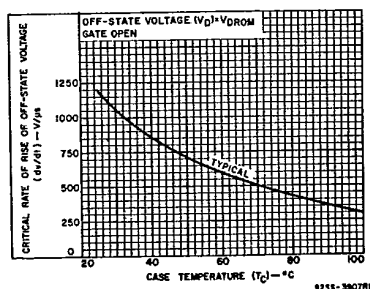
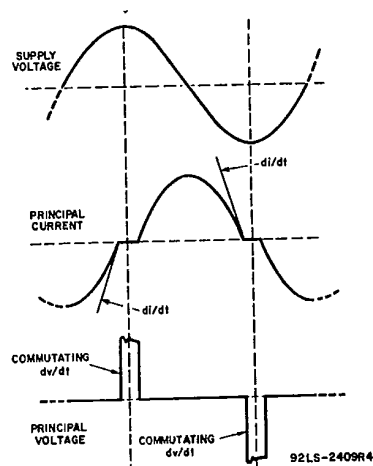


Fig. 11 — Typical critical rate-of-rise of off-state voltage vs. case temperature.

Fig. 12 — Relationship between supply voltage and principal current (inductive load) showing reference points for definition of commutating voltage (dV/dt).

T6000, T6001, T6006 Series

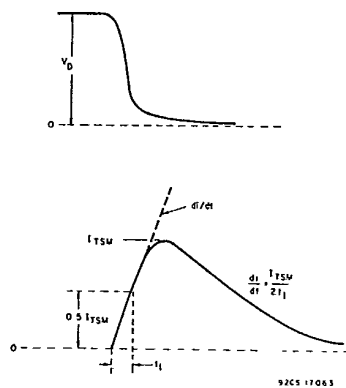


Fig. 13 — Rate-of-change of on-state current with time (defining di/dt).

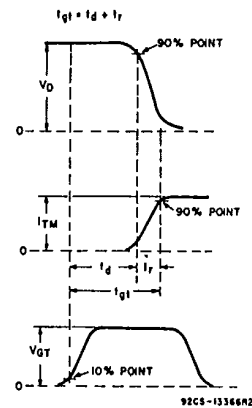


Fig. 14 — Relationship between off-state voltage, on-state current, and gate-trigger voltage showing reference points for definition of turn-on time (t_{g1}).