




55.0 x 55.0 x 26.0 (l x b x h)

Abmessungen in mm | All dimensions are in mm
Linear dimensional tolerance $\pm 0.5\text{mm}$

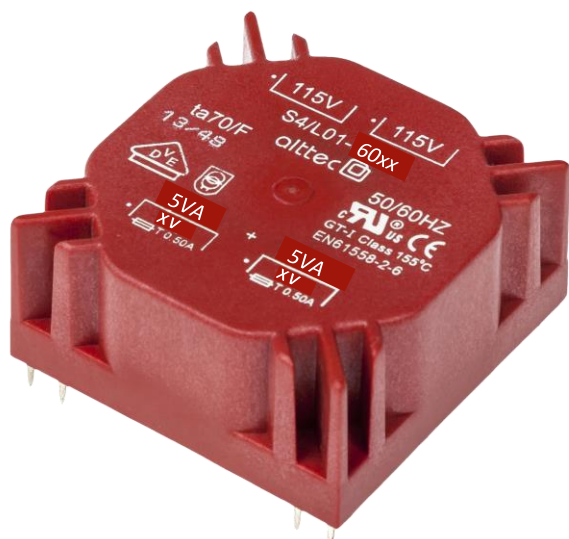

GT- I Class 155 (F)
E254189 insulation system
E332779 general purpose



EN 61558-2-6



2002/95/EG



Nicht kurzschlussfest
Not short-circuit proof

Primärspannung | input voltage


2x115 V

max. Nennleistung | output power

10 VA

Frequenz | frequency

50/60 Hz

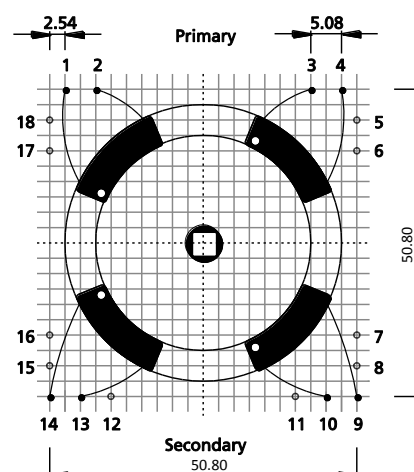

Bestellnummer
order number

Sek.-spannung
output voltage
[V]

Sek.-strom
output current
[mA]

Stifte Primär
pinning primary

Stifte Sekundär
pinning secondary

L01-6040

2 x 7

2 x 714

1/2/3/4

9/10/13/14

L01-6041

2 x 9

2 x 556

1/2/3/4

9/10/13/14

L01-6042

2 x 12

2 x 417

1/2/3/4

9/10/13/14

L01-6043

2 x 15

2 x 333

1/2/3/4

9/10/13/14

L01-6044

2 x 18

2 x 278

1/2/3/4

9/10/13/14

L01-6045*

2 x 22

2 x 227

1/2/3/4

9/10/13/14

*Keine VDE Zulassung | No VDE approval

Änderungen vorbehalten | subject to change