




GT class 155 (F)
E254189 insulation system
E332779 general purpose



DIN EN 61558

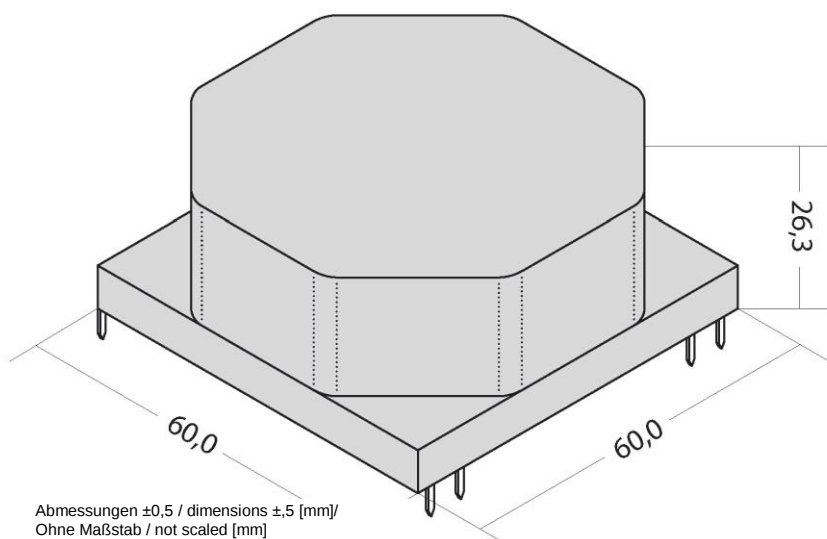

EN 61558




2002/95/EG



Nicht kurzschlussfest
Not short-circuit proof

Primärspannung / input voltage
max. Nennleistung / output power
Frequenz / frequency

2x115 V
15 VA
50-60 Hz

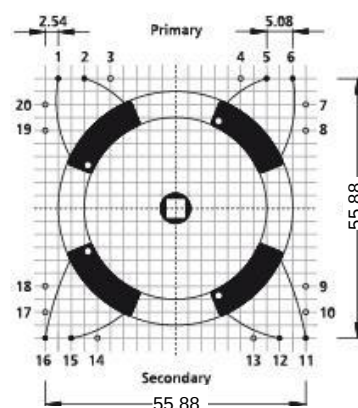

RKT (55,0x55,0x26,0)

Bestellnummer/ order number	Sek.-spannung/ output voltage	Sek.-strom/ output current	Stifte Primär/ pinning primary	Stifte Sekundär/ pinning secondary
L01-6050	2 x 7 V	2 x 1071 mA	1/2/5/6	11/12/15/16
L01-6051	2 x 9 V	2 x 833 mA	1/2/5/6	11/12/15/16
L01-6052	2 x 12 V	2 x 625 mA	1/2/5/6	11/12/15/16
L01-6053	2 x 15 V	2 x 500 mA	1/2/5/6	11/12/15/16
L01-6054	2 x 18 V	2 x 417 mA	1/2/5/6	11/12/15/16
L01-6055*	2 x 22 V	2 x 341 mA	1/2/5/6	11/12/15/16

*Keine VDE Zulassung / No VDE approval

Änderungen vorbehalten/ subject to change