




Abmessungen ±0,5 / dimensions ±,5 [mm]
Ohne Maßstab / not scaled [mm]



GT class 155 (F)
E254189 insulation system
E332779 general purpose

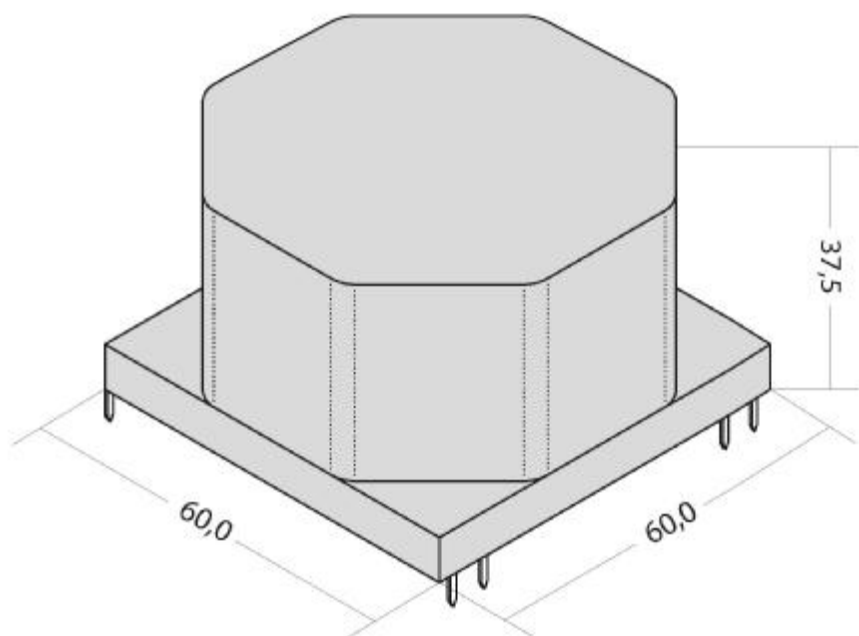

DIN EN 61558



EN 61558




2002/95/EG



Nicht kurzschlussfest
Not short-circuit proof

Primärspannung / input voltage
max. Nennleistung / output power
Frequenz / frequency

2x115 V
25 VA
50-60 Hz

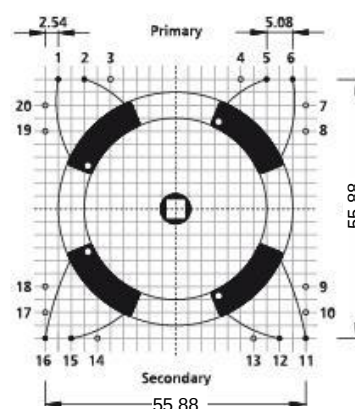

RKT (60,0x60,0x37,5)

Bestellnummer/ order number	Sek.-spannung/ output voltage	Sek.-strom/ output current	Stifte Primär/ pinning primary	Stifte Sekundär/ pinning secondary
L01-6060	2 x 7 V	2 x 1785 mA	1/2/5/6	11/12/15/16
L01-6061	2 x 9 V	2 x 1377 mA	1/2/5/6	11/12/15/16
L01-6062	2 x 12 V	2 x 1041 mA	1/2/5/6	11/12/15/16
L01-6063	2 x 15 V	2 x 832 mA	1/2/5/6	11/12/15/16
L01-6064	2 x 18 V	2 x 694 mA	1/2/5/6	11/12/15/16
L01-6065*	2 x 22 V	2 x 568 mA	1/2/5/6	11/12/15/16

*Keine VDE Zulassung / No VDE approval

Änderungen vorbehalten/ subject to change