




Abmessungen $\pm 0,5$ / dimensions $\pm 0,5$ [mm]
Ohne Maßstab / not scaled [mm]



GT class 155 (F)
E254189 insulation system
E332779 general purpose

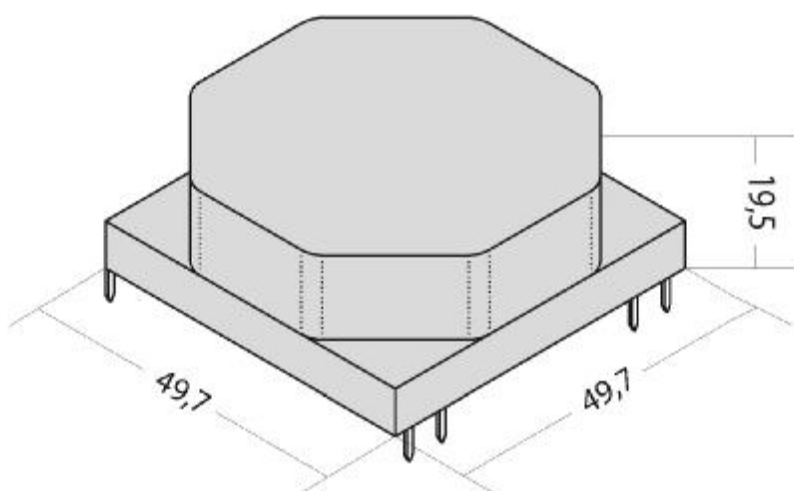

DIN EN 61558



EN 61558




2002/95/EG



Nicht kurzschlussfest
Not short-circuit proof

Primärspannung / input voltage
max. Nennleistung / output power
Frequenz / frequency

2x115 V
5,0 VA
50-60 Hz

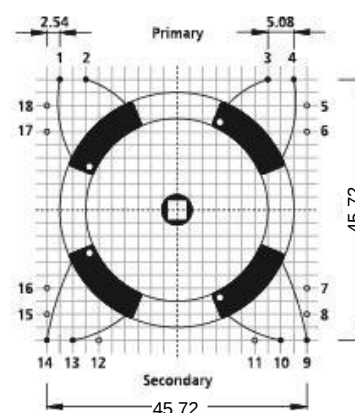

RKT (49,7x49,7x19,5)

Bestellnummer/ order number	Sek.-spannung/ output voltage	Sek.-strom/ output current	Stifte Primär/ pinning primary	Stifte Sekundär/ pinning secondary
L01-6020	2 x 7 V	2 x 357 mA	1/2/3/4	9/10/13/14
L01-6021	2 x 9 V	2 x 278 mA	1/2/3/4	9/10/13/14
L01-6022	2 x 12 V	2 x 208 mA	1/2/3/4	9/10/13/14
L01-6023	2 x 15 V	2 x 167 mA	1/2/3/4	9/10/13/14
L01-6024	2 x 18 V	2 x 139 mA	1/2/3/4	9/10/13/14
L01-6025*	2 x 22 V	2 x 114 mA	1/2/3/4	9/10/13/14

*Keine VDE Zulassung / No VDE approval

Änderungen vorbehalten/ subject to change