




Abmessungen  $\pm 0,5$  / dimensions  $\pm 0,5$  [mm]  
Ohne Maßstab / not scaled [mm]



GT class 155 (F)  
E254189 insulation system  
E332779 general purpose

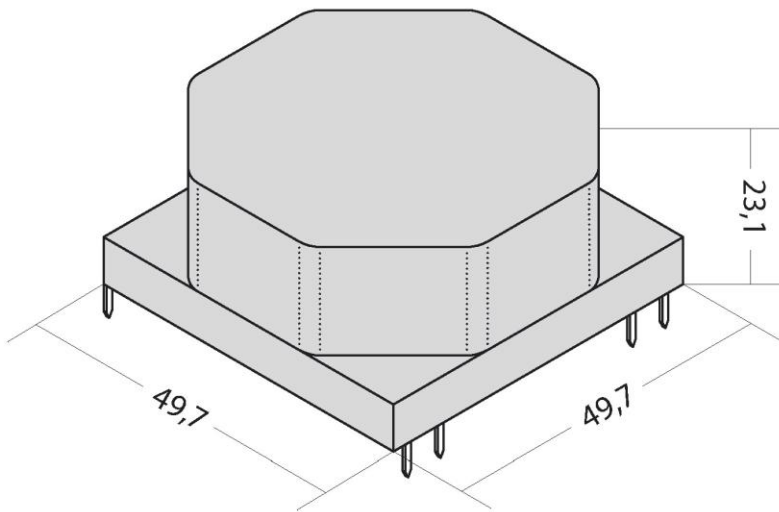

DIN EN 61558



EN 61558




2002/95/EG



Nicht kurzschlussfest  
Not short-circuit proof

**Primärspannung / input voltage**  
**max. Nennleistung / output power**  
**Frequenz / frequency**

**2x115 V**  
**7,0 VA**  
**50-60 Hz**

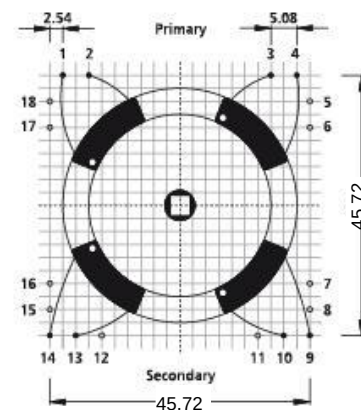

**RKT** (49,7x49,7x23,1)

| Bestellnummer/<br>order number | Sek.-spannung/<br>output voltage | Sek.-strom/<br>output current | Stifte Primär/<br>pinning primary | Stifte Sekundär/<br>pinning secondary |
|--------------------------------|----------------------------------|-------------------------------|-----------------------------------|---------------------------------------|
| L01-6030                       | <b>2 x 7 V</b>                   | 2 x 500 mA                    | 1/2/3/4                           | 9/10/13/14                            |
| L01-6031                       | <b>2 x 9 V</b>                   | 2 x 389 mA                    | 1/2/3/4                           | 9/10/13/14                            |
| L01-6032                       | <b>2 x 12 V</b>                  | 2 x 292 mA                    | 1/2/3/4                           | 9/10/13/14                            |
| L01-6033                       | <b>2 x 15 V</b>                  | 2 x 233 mA                    | 1/2/3/4                           | 9/10/13/14                            |
| L01-6034                       | <b>2 x 18 V</b>                  | 2 x 194 mA                    | 1/2/3/4                           | 9/10/13/14                            |
| L01-6035*                      | <b>2 x 22 V</b>                  | 2 x 159 mA                    | 1/2/3/4                           | 9/10/13/14                            |

\*Keine VDE Zulassung / No VDE approval

Änderungen vorbehalten/ subject to change